

PHASING SUMMARY

 **Site: 101 [Normal Traffic (Site Folder: Whenuapai Watercare TIA)]**

New Site

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated Cycle Time = 70 seconds (Site Practical Cycle Time)

Timings based on settings in the Site Phasing & Timing dialog

Phase Times determined by the program

Phase Sequence: Leading Right Turn

Reference Phase: Phase B

Input Phase Sequence: A, B


Output Phase Sequence: A, B

Phase Timing Summary

Phase	A	B
Phase Change Time (sec)	31	0
Green Time (sec)	22	14
Phase Time (sec)	39	31
Phase Split	56%	44%

See the Timing Analysis report for more detailed information including input values of Yellow Time and All-Red Time, and information on any adjustments to Intergreen Time, Phase Time and Green Time values in cases of Pedestrian Actuation, Minor Phase Actuation and Phase Frequency values (user-specified or implied) less than 100%.

Output Phase Sequence

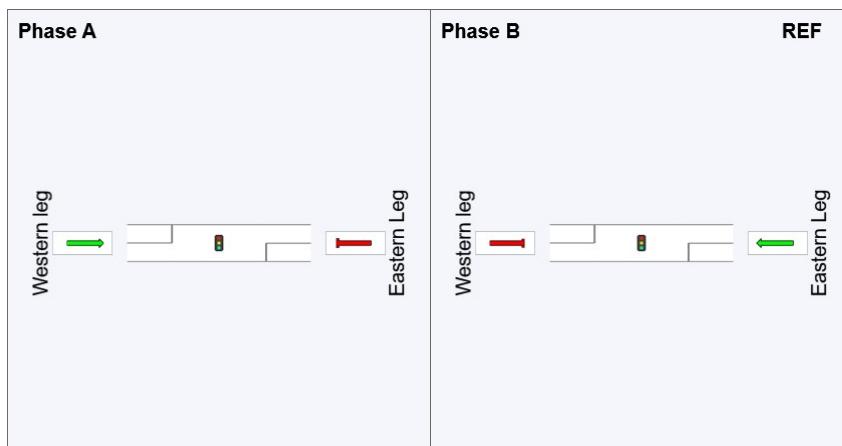

REF: Reference Phase

VAR: Variable Phase

 Normal Movement	 Permitted/Opposed
 Slip/Bypass-Lane Movement	 Opposed Slip/Bypass-Lane
 Stopped Movement	 Turn On Red
 Other Movement Class (MC) Running	 Undetected Movement
 Mixed Running & Stopped MCs	 Continuous Movement
 Other Movement Class (MC) Stopped	 Phase Transition Applied

PHASING SUMMARY

 **Site: 101 [Christmas Traffic (Site Folder: Whenuapai Watercare TIA)]**

New Site
Site Category: (None)
Signals - EQUISAT (Fixed-Time/SCATS) Isolated Cycle Time = 60 seconds (Site Practical Cycle Time)


Timings based on settings in the Site Phasing & Timing dialog
Phase Times determined by the program
Phase Sequence: Leading Right Turn
Reference Phase: Phase B
Input Phase Sequence: A, B
Output Phase Sequence: A, B

Phase Timing Summary

Phase	A	B
Phase Change Time (sec)	27	0
Green Time (sec)	16	10
Phase Time (sec)	33	27
Phase Split	55%	45%

See the Timing Analysis report for more detailed information including input values of Yellow Time and All-Red Time, and information on any adjustments to Intergreen Time, Phase Time and Green Time values in cases of Pedestrian Actuation, Minor Phase Actuation and Phase Frequency values (user-specified or implied) less than 100%.

Output Phase Sequence

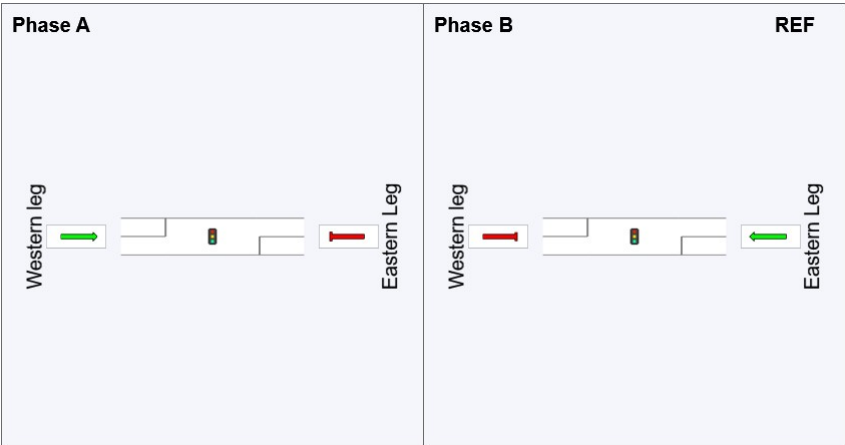

REF: Reference Phase
VAR: Variable Phase

 Normal Movement	 Permitted/Opposed
 Slip/Bypass-Lane Movement	 Opposed Slip/Bypass-Lane
 Stopped Movement	 Turn On Red
 Other Movement Class (MC) Running	 Undetected Movement
 Mixed Running & Stopped MCs	 Continuous Movement
 Other Movement Class (MC) Stopped	 Phase Transition Applied

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: BECA LIMITED | Licence: PLUS / Enterprise | Processed: Monday, 7 March 2022 3:27:22 pm

Project: C:\Users\BM631\Beca\4219201 - Whenuapai WW Servicing Scheme - Documents\5. Reports\TIA\working files\SIDRA Modelling
\Whenuapai TIA All Sites.sip9